
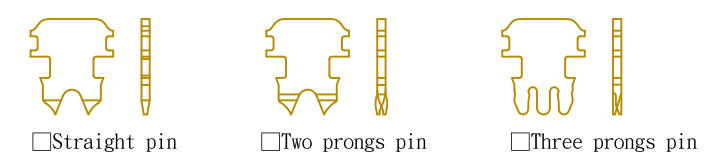


- Drawing Number: P8-002-4-□□□□□
- Housing Material: Polycarbonate, UL Flammability Rating:
 - ①=UL 94V-0, RoHS Compliant.
 - ②=UL 94V-2, RoHS Compliant.
 - Contacts Type:
 - ①=Straight pin fits Stranded wire only.
 - ②=Two prong angled pin fits Solid/Stranded Wires.
 - ③=Three prong pin fits Solid/Stranded Wires.
 - Gold Plating:
 - ⓕ= Fu" (Flash), ⓐ=2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$),
 - ⓗ= 3u" ($\geq 0.0762 \mu\text{m}$), Ⓢ= 6u" ($\geq 0.1524 \mu\text{m}$),
 - Ⓤ=15u" ($\geq 0.381 \mu\text{m}$), Ⓦ=30u" ($\geq 0.762 \mu\text{m}$),
 - Ⓩ=50u" ($\geq 1.27 \mu\text{m}$).
 - Packaging Quantity:
 - Ⓢ=1000pcs, Ⓣ=500pcs, Ⓤ=250pcs, Ⓥ=200pcs
 - Ⓦ= 100pcs, Ⓧ= 50pcs, Ⓨ= 25pcs, Ⓩ= 10pcs
 - Housing Color: Transparent, other colors are available.
(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
 - Shielded Material: Brass with nickel plated, or Non-Shielded.
 - Operating Temperature: -10°C to 60°C.

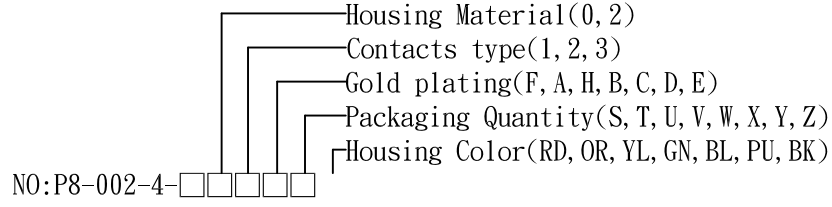

NOTE TOL: ±0.1

D	2020.3.04.Revised Date	3RD		Drawing	<i>Chidy</i>	Date	2014/07/11	UL Code	8P8C-SX	Plug Master INDUSTRIAL CO., LTD www.plugmaster.com.tw
A	An initial version	Unit	m/m	Checked	<i>Ivan</i>	Date	2020/3/04	Description		
Rev	Description	Scale	1:1	Approved	<i>Jason</i>	Date	2020/3/04	F Double rows Shielded 1.4mm		