



Drawing Number: P8-039-21-□□□□□

- Housing Material: Polycarbonate, UL Flammability Rating:
 - ①=UL 94V-0, RoHS Compliant.
 - ②=UL 94V-2, RoHS Compliant.
- Contacts Type:
 - ①=Straight pin fits Stranded wire only.
 - ②=Two prong angled pin fits Solid/Stranded Wires.
 - ③=Three prong pin fits Solid/Stranded Wires.
- Gold Plating:
 - ⓕ=Fu" (Flash), ⓐ=2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$),
 - ⓗ=3u" ($\geq 0.0762 \mu\text{m}$), ⓑ=6u" ($\geq 0.1524 \mu\text{m}$),
 - ⓒ=15u" ($\geq 0.381 \mu\text{m}$), ⓓ=30u" ($\geq 0.762 \mu\text{m}$),
 - ⓔ=50u" ($\geq 1.27 \mu\text{m}$).
- Minimum Packaging Quantity:
 - Ⓢ=1000pcs, Ⓣ=500pcs, Ⓤ=250pcs, Ⓥ=200pcs
 - Ⓦ=100pcs, Ⓧ=50pcs, Ⓨ=25pcs, Ⓩ=10pcs, ⓐ=Other
- Housing Color: Clear, other colors are available.
(Clear=Blank, Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
- Shielded Material: Brass with nickel plated, or Non-Shielded.
- Operating Temperature: -10°C to 60°C .

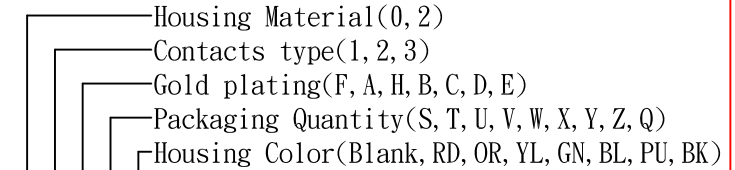

Drawing NO: P8-039-21-□□□□□

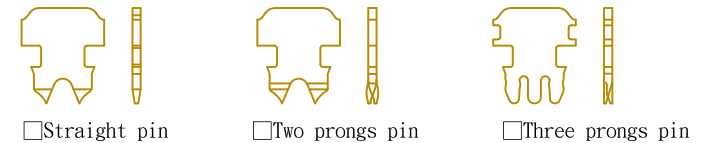

NOTE TOL: ±0.1

C	2023/07/07 Revised Date	3RD		Drawing	Chidy	Date	2014/12/10
A	An initial version	Unit	m/m	Checked	Chris	Date	2015/04/15
Rev	Description	Scale	1:1	Approved	Jason	Date	2015/04/15

UL Code	8P8C-1
Description	
2R-V cable OD 3.8mm w/opened insert 0.6mm	



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw