


Drawing Number: P6-006-□□□□□

- Housing Material: Polycarbonate, UL Flammability Rating:
  - ①=UL 94V-0, RoHS Compliant.
  - ②=UL 94V-2, RoHS Compliant.
- Contacts Type:
  - ①=Straight pin fits Stranded wire only.
  - ②=Two prong angled pin fits Solid/Stranded Wires.
  - ③=Three prong pin fits Solid/Stranded Wires.
- Gold Plating:
  - Ⓕ= Fu" (Flash), Ⓖ=2-3u" ( $0.0508 \mu m \leq A \leq 0.0762 \mu m$ ),
  - Ⓖ= 3u" ( $\geq 0.0762 \mu m$ ), Ⓒ= 6u" ( $\geq 0.1524 \mu m$ ),
  - Ⓒ=15u" ( $\geq 0.381 \mu m$ ), Ⓓ=30u" ( $\geq 0.762 \mu m$ ),
  - Ⓓ=50u" ( $\geq 1.27 \mu m$ ).
- Packaging Quantity:
  - Ⓢ=1000pcs, Ⓣ=500pcs, Ⓤ=250pcs, Ⓟ=200pcs
  - Ⓡ= 100pcs, Ⓧ= 50pcs, Ⓨ= 25pcs, Ⓩ= 10pcs
  - Ⓛ= Other
- Housing Color: Transparent, other colors are available.  
(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
- Shielded Material: Brass with nickel plated, or Non-Shielded.
- Operating Temperature: -10°C to 60°C.

NO: PX-0XX-□□□□□

- Housing Material (0, 2)
- Contacts type (1, 2, 3)
- Gold plating (F, A, H, B, C, D, E)
- Packaging Quantity (S, T, U, V, W, X, Y, Z)
- Housing Color (RD, OR, YL, GN, BL, PU, BK)

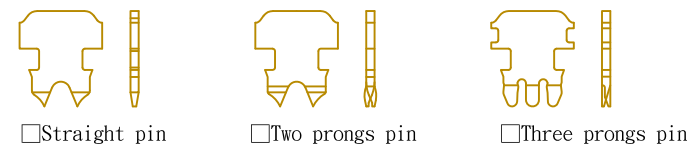

NOTE TOL: ±0.1

B	2017.09.28. Rescheduling coding	3RD		Drawing	<i>Chidy</i>	Date	2004/11/11	UL Code	6P2C	<b>Plug Master</b> INDUSTRIAL CO., LTD www.plugmaster.com.tw
A	An initial version	Unit	m/m	Checked	<i>Chris</i>	Date	2004/11/11	Description		
Rev	Description	Scale	1:1	Approved	<i>Jason</i>	Date	2004/11/11	R		