

Drawing Number: P6-D53-□□□□□

1. Housing Material: Polycarbonate, UL Flammability Rating:

①=UL 94V-0, RoHS Compliant.

②=UL 94V-2, RoHS Compliant.

2. Contacts Type: ①=Straight pin fits Stranded wire only.

②=Two prong angled pin fits Solid/Stranded Wires.

③=Three prong pin fits Solid/Stranded Wires.

3. Gold Plating: Ⓣ= Fu" (Flash), Ⓜ= 2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$),

Ⓢ= 3u" ($\geq 0.0762 \mu\text{m}$), Ⓟ= 6u" ($\geq 0.1524 \mu\text{m}$),

Ⓤ= 15u" ($\geq 0.381 \mu\text{m}$), Ⓡ= 30u" ($\geq 0.762 \mu\text{m}$),

Ⓣ= 50u" ($\geq 1.27 \mu\text{m}$).

4. Packaging Quantity: Ⓢ=1000pcs, Ⓣ=500pcs, Ⓤ=250pcs, Ⓡ=200pcs

Ⓡ= 100pcs, Ⓡ= 50pcs, Ⓡ= 25pcs, Ⓡ= 10pcs




Ⓡ= Other

5. Housing Color: Transparent, other colors are available.

(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)

6. Shielded Material: Brass with nickel plated, or Non-Shielded.

7. Operating Temperature: -10°C to 60°C .

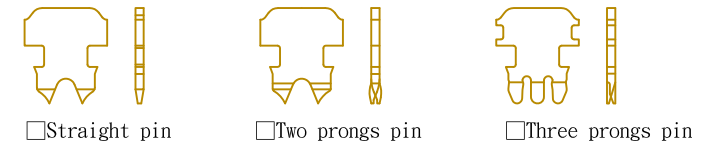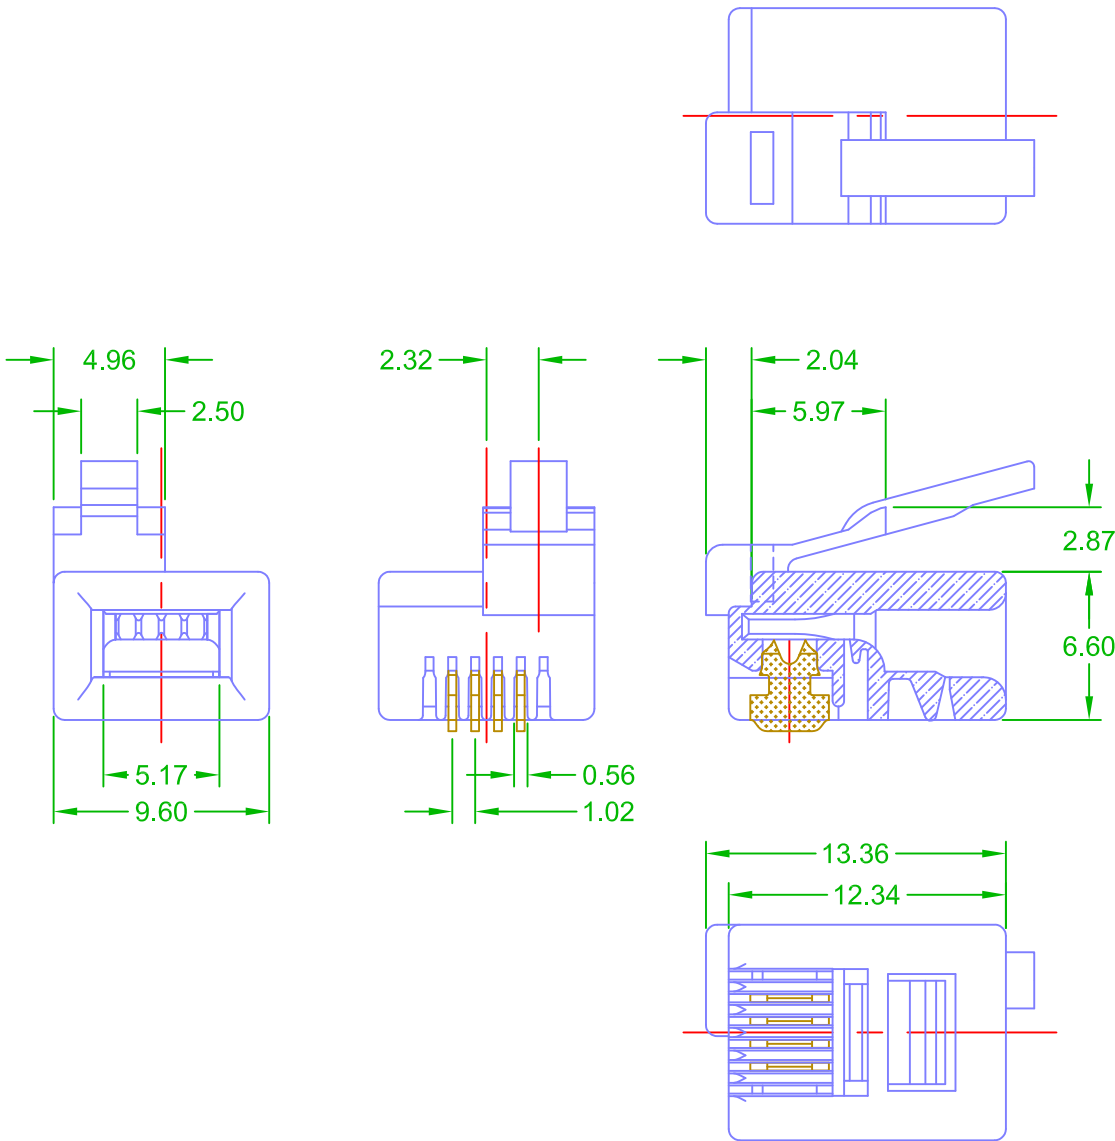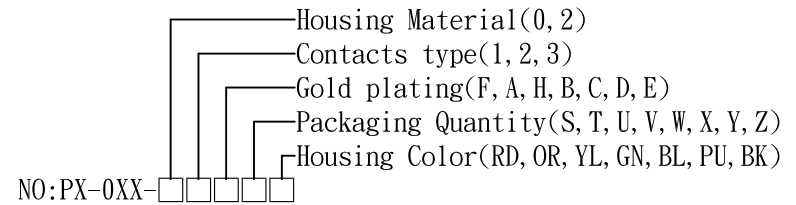

NOTE TOL: ± 0.1

B	2017.11.27. Rescheduling coding	3RD		Drawing	Chidy	Date	2004/11/11	UL Code	DEC6P4C	Plug Master INDUSTRIAL CO., LTD www.plugmaster.com.tw
A	An initial version	Unit	m/m	Checked	Chris	Date	2004/11/11	Description		
Rev	Description	Scale	1:1	Approved	Jason	Date	2004/11/11	F		