


Drawing Number: P6-L61-□□□□□

- Housing Material: Polycarbonate, UL Flammability Rating:
 ①=UL 94V-0, RoHS Compliant.
 ②=UL 94V-2, RoHS Compliant.
- Contacts Type: ①=Straight pin fits Stranded wire only.
 ②=Two prong angled pin fits Solid/Stranded Wires.
 ③=Three prong pin fits Solid/Stranded Wires.
- Gold Plating: ①= Fu" (Flash), ②=2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$),
 ③= 3u" ($\geq 0.0762 \mu\text{m}$), ④= 6u" ($\geq 0.1524 \mu\text{m}$),
 ⑤=15u" ($\geq 0.381 \mu\text{m}$), ⑥=30u" ($\geq 0.762 \mu\text{m}$),
 ⑦=50u" ($\geq 1.27 \mu\text{m}$).
- Packaging Quantity: ①=1000pcs, ②=500pcs, ③=250pcs, ④=200pcs
 ⑤= 100pcs, ⑥= 50pcs, ⑦= 25pcs, ⑧= 10pcs
 ⑨= Other
- Housing Color: Transparent, other colors are available.
 (Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
- Shielded Material: Brass with nickel plated, or Non-Shielded.
- Operating Temperature: -10°C to 60°C .

NO: PX-0XX-□□□□□

- Housing Material (0, 2)
- Contacts type (1, 2, 3)
- Gold plating (F, A, H, B, C, D, E)
- Packaging Quantity (S, T, U, V, W, X, Y, Z)
- Housing Color (RD, OR, YL, GN, BL, PU, BK)

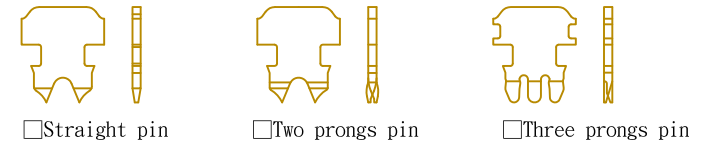

NOTE TOL: ±0.1

B	2017.11.22. Rescheduling coding	3RD	⊕	Drawing	Chidy	Date	2004/11/11
A	An initial version	Unit	m/m	Checked	Chris	Date	2004/11/11
Rev	Description	Scale	1:1	Approved	Jason	Date	2004/11/11

UL Code	L6P6C
Description	
F	



Plug Master
 INDUSTRIAL CO., LTD
 www.plugmaster.com.tw