


Drawing Number: P8-002-5-□□□□□

- Housing Material: Polycarbonate, UL Flammability Rating:
 - ①=UL 94V-0, RoHS Compliant.
 - ②=UL 94V-2, RoHS Compliant.
- Contacts Type:
 - ①=Straight pin fits Stranded wire only.
 - ②=Two prong angled pin fits Solid/Stranded Wires.
 - ③=Three prong pin fits Solid/Stranded Wires.
- Gold Plating:
 - ⓕ= Fu" (Flash), ⓐ=2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$),
 - ⓗ= 3u" ($\geq 0.0762 \mu\text{m}$), Ⓢ= 6u" ($\geq 0.1524 \mu\text{m}$),
 - Ⓤ=15u" ($\geq 0.381 \mu\text{m}$), Ⓧ=30u" ($\geq 0.762 \mu\text{m}$),
 - Ⓨ=50u" ($\geq 1.27 \mu\text{m}$).
- Packaging Quantity:
 - Ⓢ=1000pcs, Ⓣ=500pcs, Ⓤ=250pcs, Ⓥ=200pcs
 - Ⓦ= 100pcs, Ⓧ= 50pcs, Ⓨ= 25pcs, Ⓩ= 10pcs
 - ⓐ= Other
- Housing Color: Transparent, other colors are available.
(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
- Shielded Material: Brass with nickel plated, or Non-Shielded.
- Operating Temperature: -10°C to 60°C .

NO: PX-0XX-□□□□□

- Housing Material (0, 2)
- Contacts type (1, 2, 3)
- Gold plating (F, A, H, B, C, D, E)
- Packaging Quantity (S, T, U, V, W, X, Y, Z)
- Housing Color (RD, OR, YL, GN, BL, PU, BK)

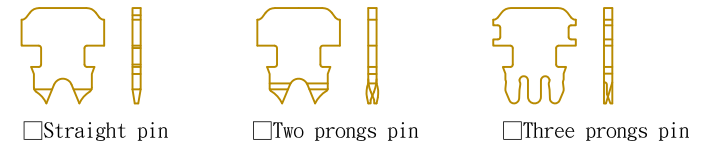


□ Straight pin

□ Two prongs pin

□ Three prongs pin

NOTE TOL: ± 0.1

B	2018.04.12. Rescheduling coding	3RD	⊕	Drawing	Chidy	Date	2014/07/11	UL Code	8P8C-S1	 Plug Master INDUSTRIAL CO., LTD www.plugmaster.com.tw
A	An initial version	Unit	m/m	Checked	Chris	Date	2014/07/11	Description		
Rev	Description	Scale	1:1	Approved	Jason	Date	2014/07/11	F-Shielded 2 Layers With load bar 1.4mm		