

Drawing Number: P8-005-24-□□□□□□

1. Housing Material: Polycarbonate, UL Flammability Rating:

①=UL 94V-0, RoHS Compliant.

②=UL 94V-2, RoHS Compliant.

2. Contacts Type: ①=Straight pin fits Stranded wire only.

②=Two prong angled pin fits Solid/Stranded Wires.

③=Three prong pin fits Solid/Stranded Wires.

3. Gold Plating: ①=Fu" (Flash), ②=2-3u" (0.0508 μm ≤ A ≤ 0.0762 μm),

③=3u" (≥ 0.0762 μm), ④=6u" (≥ 0.1524 μm),

⑤=15u" (≥ 0.381 μm), ⑥=30u" (≥ 0.762 μm),

⑦=50u" (≥ 1.27 μm).

4. Packaging Quantity: ⑧=1000pcs, ⑨=500pcs, ⑩=250pcs, ⑪=200pcs



⑫=100pcs, ⑬=50pcs, ⑭=25pcs, ⑮=10pcs

5. Housing Color: Transparent, other colors are available.

(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)

6. Shielded Material : Brass with nickel plated, or Non-Shielded.

7. Operating Temperature: -10°C to 60°C.

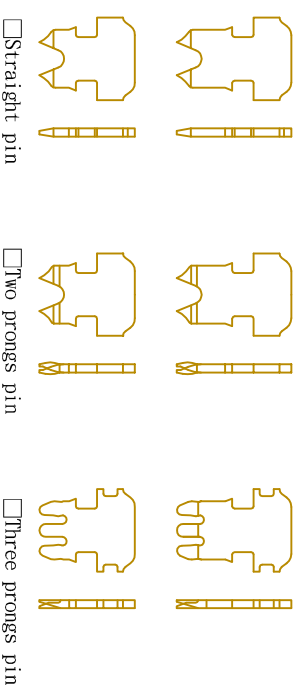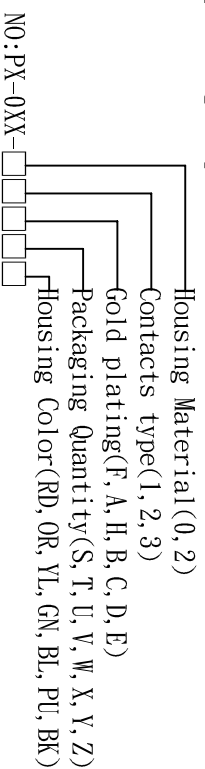

NOTE: TOL: ±0.1

B	2017.10.18. Rescheduling coding	3RD	3RD	Drawing	<i>Chidya</i>	Date	2017/07/04
A	An initial version	Unit	m/m	Checked	<i>Chavis</i>	Date	2017/07/04
Rev	Description	Scale	1:1	Approved	<i>Sasom</i>	Date	2017/07/04

UL Code	8P8CS
Description	C6 Shielded Feed Through Plug



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw