


- Drawing Number: P8-005-27-□□□□□
- Housing Material: Polycarbonate, UL Flammability Rating:
 - ①=UL 94V-0, RoHS Compliant.
 - ②=UL 94V-2, RoHS Compliant.
 - Contacts Type:
 - ①=Straight pin fits Stranded wire only.
 - ②=Two prong angled pin fits Solid/Stranded Wires.
 - ③=Three prong pin fits Solid/Stranded Wires.
 - Gold Plating:
 - ⓕ= Fu" (Flash), ⓐ=2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$)
 - ⓗ= 3u" ($\geq 0.0762 \mu\text{m}$), ⓑ= 6u" ($\geq 0.1524 \mu\text{m}$),
 - ⓒ=15u" ($\geq 0.381 \mu\text{m}$), ⓓ=30u" ($\geq 0.762 \mu\text{m}$),
 - ⓔ=50u" ($\geq 1.27 \mu\text{m}$).
 - Packaging Quantity:
 - Ⓢ=1000pcs, Ⓣ=500pcs, Ⓤ=250pcs, Ⓥ=200pcs
 - Ⓦ= 100pcs, Ⓧ= 50pcs, Ⓨ= 25pcs, Ⓩ= 10pcs
 - ⓐ= Other
 - Housing Color: Transparent, other colors are available.
(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
 - Shielded Material: Brass with nickel plated, or Non-Shielded.
 - Operating Temperature: -10°C to 60°C .

Housing Material(0, 2)
 Contacts type(1, 2, 3)
 Gold plating(F, A, H, B, C, D, E)
 Packaging Quantity(S, T, U, V, W, X, Y, Z)
 Housing Color(RD, OR, YL, GN, BL, PU, BK)

NO: PX-0XX-□□□□□

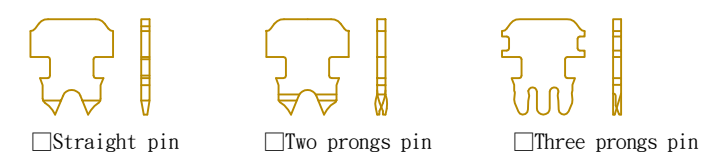

NOTE TOL: ±0.1

B	2018.12.13. Rescheduling coding	3RD		Drawing	Jay	Date	2018/12/13	UL Code	FT8P8C-S6
A	An initial version	Unit	m/m	Checked	Hsien	Date	2018/12/13	Description	
Rev	Description	Scale	1:1	Approved	Kevin	Date	2018/12/13	C5e Shielded Feed Through Plug	



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw