

Series No.: P8-007-48-□□□□□□

1. Housing Material: Polycarbonate, UL Flammability Rating:

①=UL 94V-0, RoHS Compliant.

②=UL 94V-2, RoHS Compliant.

2. Contacts Type: ①=Straight pin fits Stranded wire only.

②=Two prong angled pin fits Solid/Stranded Wires.

③=Three prong pin fits Solid/Stranded Wires.

3. Gold Plating: ④=Fu" (Flash), ⑤=2-3u" (0.0508 μm \leq A \leq 0.0762 μm)

⑥= 3u" (\geq 0.0762 μm), ⑦= 6u" (\geq 0.1524 μm),

⑧=15u" (\geq 0.381 μm), ⑨=30u" (\geq 0.762 μm),

⑩=50u" (\geq 1.27 μm).

4. Packaging Quantity: ⑪=1000pcs, ⑫=500pcs, ⑬=250pcs, ⑭=200pcs



⑮= 100pcs, ⑯= 50pcs, ⑰= 25pcs, ⑱= 10pcs

5. Housing Color: Transparent, other colors are available.

(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)

6. Shielded Material : Brass with nickel plated, or Non-Shielded.

7. Operating Temperature: -10°c to 60°c.

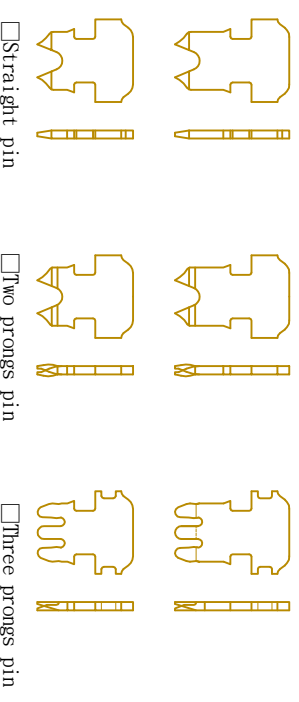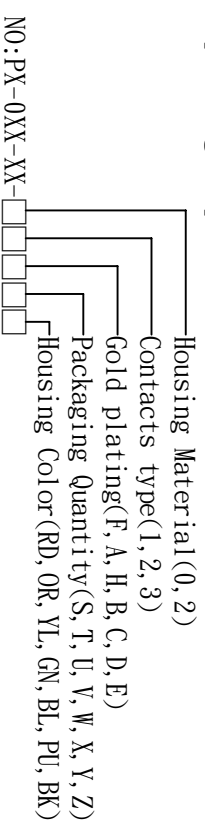

NOTE: TOL: \pm 0.1

B	2017.06.22. Rescheduling coding	3RD		Drawing	<i>Jay</i>	Date	2016/08/05
A	An initial version	Unit	m/m	Checked	<i>Wiem</i>	Date	2016/08/11
Rev	Description	Scale	1:1	Approved	<i>Saam</i>	Date	2016/08/11

UL Code	8P8C
Description	2R-V feed through plug 3 prong pin Cat 6