

Drawing Number: P8-S52-1-□□□□□□

1. Housing Material: Polycarbonate, UL Flammability Rating:

①=UL 94V-0, RoHS Compliant.

②=UL 94V-2, RoHS Compliant.

2. Contacts Type: ①=Straight pin fits Stranded wire only.

②=Two prong angled pin fits Solid/Stranded Wires.

③=Three prong pin fits Solid/Stranded Wires.

3. Gold Plating:

④=Fu" (Flash),      ⑦=2-3u" (0.0508 μm ≤ A ≤ 0.0762 μm),

⑧=3u" (≥ 0.0762 μm),      ⑧=6u" (≥ 0.1524 μm),

⑨=15u" (≥ 0.381 μm),      ⑨=30u" (≥ 0.762 μm),

⑩=50u" (≥ 1.27 μm).

4. Packaging Quantity: ③=1000pcs, ④=500pcs, ⑤=250pcs, ⑥=200pcs

⑦=100pcs, ⑧=50pcs, ⑨=25pcs, ⑩=10pcs


⑪= Other

5. Housing Color: Transparent, other colors are available.




(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)

6. Shielded Material : Brass with nickel plated, or Non-Shielded.

7. Operating Temperature: -10 °C to 60 °C.

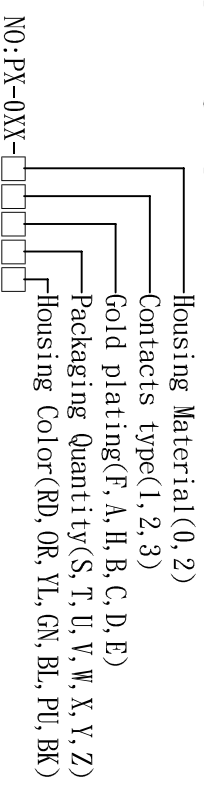

NO: PX-0XX-□□□□□□



Straight pin

Two prongs pin

Three prongs pin

NOTE: TOL: ±0.1

B	2018.09.05. Rescheduling coding	3RD		Drawing	<i>Shidy</i>	Date	2004/1/1/11
A	An initial version	Unit	m/m	Checked	<i>Chuis</i>	Date	2004/1/1/11
Rev	Description	Scale	1:1	Approved	<i>Saam</i>	Date	2004/1/1/11

UL Code	S-8P8C
Description	F Little Strain Relief

**Plug Master**  
INDUSTRIAL CO., LTD  
www.plugmaster.com.tw