


Drawing Number: P8-S80-3-□□□□□

1. Housing Material: Polycarbonate, UL Flammability Rating:
 - ①=UL 94V-0, RoHS Compliant.
 - ②=UL 94V-2, RoHS Compliant.
2. Contacts Type:
 - ①=Straight pin fits Stranded wire only.
 - ②=Two prong angled pin fits Solid/Stranded Wires.
 - ③=Three prong pin fits Solid/Stranded Wires.
3. Gold Plating:
 - Ⓕ= Fu" (Flash), Ⓐ=2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$),
 - Ⓖ= 3u" ($\geq 0.0762 \mu\text{m}$), Ⓑ= 6u" ($\geq 0.1524 \mu\text{m}$),
 - Ⓒ=15u" ($\geq 0.381 \mu\text{m}$), Ⓓ=30u" ($\geq 0.762 \mu\text{m}$),
 - Ⓔ=50u" ($\geq 1.27 \mu\text{m}$).
4. Packaging Quantity:
 - Ⓢ=1000pcs, Ⓣ=500pcs, Ⓤ=250pcs, Ⓟ=200pcs
 - Ⓡ= 100pcs, Ⓧ= 50pcs, Ⓨ= 25pcs, Ⓩ= 10pcs
 - Ⓛ= Other
5. Housing Color: Transparent, other colors are available.
(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
6. Shielded Material: Brass with nickel plated, or Non-Shielded.
7. Operating Temperature: -10°C to 60°C .

NO: PX-0XX-□□□□□

- Housing Material (0, 2)
- Contacts type (1, 2, 3)
- Gold plating (F, A, H, B, C, D, E)
- Packaging Quantity (S, T, U, V, W, X, Y, Z)
- Housing Color (RD, OR, YL, GN, BL, PU, BK)

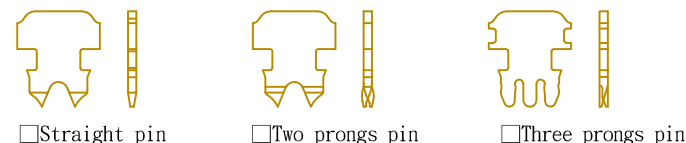

NOTE TOL: ±0.1

B	2018.09.10. Rescheduling coding	3RD		Drawing	<i>Chidy</i>	Date	2005/08/28	UL Code	S8P8C-2
A	An initial version	Unit	m/m	Checked	<i>Chris</i>	Date	2005/08/28	Description	
Rev	Description	Scale	1:1	Approved	<i>Jason</i>	Date	2005/08/28	F with insert and divider, without Strain Relief	



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw