

Drawing Number:UK-002-□□□□□□

1. Housing Material:Polycarbonate, UL Flammability Rating:

①=UL 94V-0, RoHS Compliant.

②=UL 94V-2, RoHS Compliant.

2. Contacts Type: ①=Straight pin fits Stranded wire only.

②=Two prong angled pin fits Solid/Stranded Wires.

③=Three prong pin fits Solid/Stranded Wires.

3. Gold Plating: ①= Fu" (Flash), ②=2-3u" ( $0.0508 \mu m \leq A \leq 0.0762 \mu m$ ),

③= 3u" ( $\geq 0.0762 \mu m$ ), ④= 6u" ( $\geq 0.1524 \mu m$ ),

⑤=15u" ( $\geq 0.381 \mu m$ ), ⑥=30u" ( $\geq 0.762 \mu m$ ),

⑦=50u" ( $\geq 1.27 \mu m$ ).

4. Packaging Quantity: ①=1000pcs, ②=500pcs, ③=250pcs, ④=200pcs

⑤= 100pcs, ⑥= 50pcs, ⑦= 25pcs, ⑧= 10pcs


⑨= Other

5. Housing Color:Transparent , other colors are available.

(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)

6. Shielded Material : Brass with nickel plated, or Non-Shielded.

7. Operating Temperature:-10°C to 60°C.

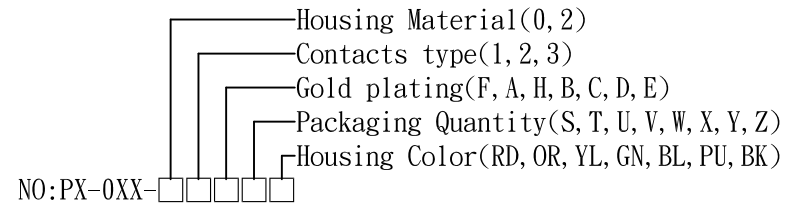

NOTE TOL:±0.1

B	2018.04.10. Rescheduling coding	3RD		Drawing	Chidy	Date	2004/11/11
A	An initial version	Unit	m/m	Checked	Chris	Date	2004/11/11
Rev	Description	Scale	1:1	Approved	Jason	Date	2004/11/11

UL Code	UK6P4C
Description	
F	



**Plug Master**  
INDUSTRIAL CO., LTD  
www.plugmaster.com.tw